

# IP Indoor Monitor

## 150M-S9

Featuring a Linux operating system and customizable UI, 150 Linux video door phone system contains most functions of 280 Linux intercom system, such as video intercom, door access, emergency call, security alarm, etc. It also supports communication with IP phone or SIP softphone via SIP protocol. In sum, it is very user-friendly and highly cost-effective.




### Specifications:

Physical Property	
System	Linux
CPU	1GHz,ARM Cortex-A7
Memory	64MB DDR2 SDRAM
Flash	16MB NAND FLASH
Display	10.1" TFT LCD, 1024x600
Power	DC12V
Standby power	1.5W
Rated Power	9W
Temperature	-10℃ - +55℃
Humidity	20%-85%
Audio & Video	
Audio Codec	G.711
Video Codec	H.264
Screen	Capacitive, Touch Screen
Camera	No
Network	
Ethernet	10M/100Mbps, RJ-45
Protocol	TCP/IP、SIP
Features	
IP Camera Support	No
Multi Language	Yes
Record	Picture
Elevator Control	Yes
Home Automation	No
Alarm	Yes(8 Zones)
UI Customized	Yes
Message Receiving	Yes

### Key features:

- UI customization
- Integration of elevator control
- Standard SIP 2.0

### Dimension & Installation:

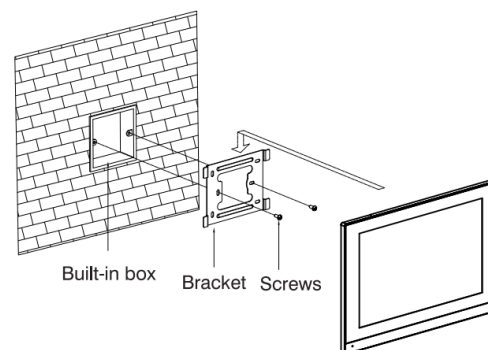

Size: 270\*189\*16.5mm