

# 304 Indoor Monitor 304M-K7

DNAKE wireless video doorbell systems operate in 2.4GHz communication. Any door camera can come with one or two indoor unit. The system is easy to install and usually don't require any additional costs, and has a long-range transmission.




## **Specifications:**

Physical Property	
СРИ	N32926
Flash	64MB
Option	TF Card (≤32G) for Video Recording
Product Size (WxHxD)	214.85 x 149.85 x 21 (mm)
Screen	7' ' TFT LCD Screen
Resolution	800×480
Camera	0.3MP CMOS Camera
Installation	Surface Mounted or Desktop
Material	ABS Casing
Button	9 Touch Buttons
Power	Rechargeable Lithium Battery (2500mAh)
Working Temperature	-10°C~+55°C
Working Humidity	20%~80%
Feature	
Snapshot Record	100 PCS
Video Record	Yes(TF Card Needed)
Multi-Language	8 Languages
No. of Door Camera Supported	2
Combination	Max. 2 Door Cameras+ Max. 2 Indoor Units (Monitor/Handset)

### **Key features:**


- Wireless doorbell, easy to setup
- Video/Snapshot recording
- Long-range transmission
- ➤ Multi-language

#### Overview:

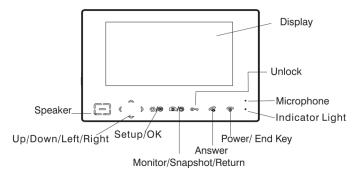

#### Hole for Wall Mounting

Email: sales01@dnake.com



Hole for Power Supply