

# Analog Outdoor Station

## 608D-A7

Based on 485 communication protocol and differential signaling transmission, 608 analogue system is applicable for high-rise/multi-story residential building or building complex. The functions involve video intercom, real-time monitoring, unlocking, emergency alarm, call from doorbell or secondary outdoor station, and elevator control, etc.




### Specifications:

Physical Property	
System	Analog
MCU	STM32F030R8T6
Flash	M25PE40
Display	4.3 " /3.5" TFT LCD, 480x272
Power	DC30V
Standby power	3W(4.3" )/2.5W(3.5" )
Rated Power	8W(4.3" )/7.5W(3.5" )
Button	Mechanical Button
RFID Card Reader	IC/ID, 30,000 pcs
Temperature	-40℃ - +70℃
Humidity	20%-93%
IP Class	IP55
Multiple Installation	Flush mounted, Surface mounted
Camera	CMOS 0.4M pixel
LED Night Vision	Yes(6pcs)
Features	
Calling Indoor Monitor	Yes
Exit Button	Yes
Calling Management Center	Yes
Elevator Control	Optional


### Key features:

- Video intercom
- Open the door by IC/ID card (30,000 users)
- Elevator control integration

### Dimension & Installation:

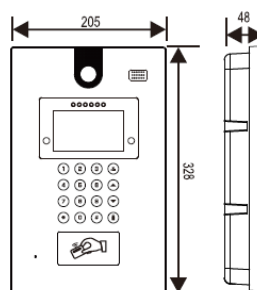

Product Size	205x328x48mm
Built-in box size	188x315x50mm
Installation size	190x318x60mm

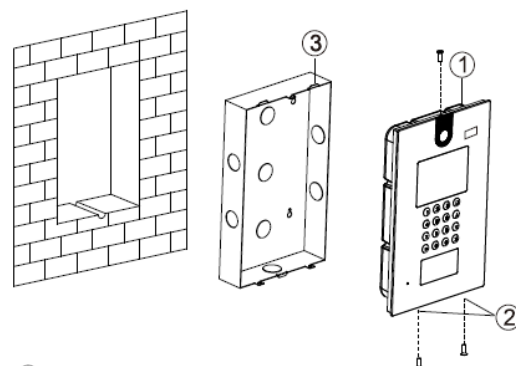

- ① Outdoor panel
- ② Inner hexagon screw
- ③ Built-in box