


# Analog Indoor Monitor

## 608M-I3

Based on 485 communication protocol and differential signaling transmission, 608 analogue system is applicable for high-rise/multi-story residential building or building complex. The functions involve video intercom, real-time monitoring, unlocking, emergency alarm, call from doorbell or secondary outdoor station, and elevator control, etc.

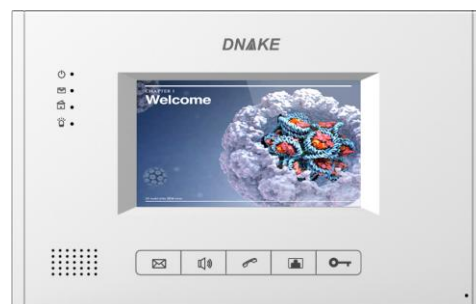

### Specifications:

| Physical Property                            |                       |
|----------------------------------------------|-----------------------|
| MCU                                          | T530EA                |
| Flash                                        | SPI Flash 16M-Bit     |
| Frequency Range                              | 400Hz ~ 3400Hz        |
| Display                                      | 4.3" TFT LCD, 480x272 |
| Display Type                                 | Capacitive            |
| Button                                       | Mechanical button     |
| Device Size                                  | 201x128x14mm          |
| Power                                        | DC30V                 |
| Standby power                                | 0.7W                  |
| Rated Power                                  | 6W                    |
| Temperature                                  | -10°C - +55°C         |
| Humidity                                     | 20%-93%               |
| IP Glass                                     | IP30                  |
| Features                                     |                       |
| Call with Outdoor Station& Management Center | Yes                   |
| Monitor Outdoor Station                      | Yes                   |
| Remotely unlock                              | Yes                   |
| Mute, Do Not Disturb                         | Yes                   |
| External Alarm Device                        | Yes                   |
| Alarm                                        | Yes(8 Zones)          |
| Chord Ring Tone                              | Yes                   |
| External Door Bell                           | Yes                   |
| Message Receiving                            | Yes(Optional)         |
| Snapshot                                     | Yes(Optional)         |
| Elevator Linkage                             | Yes(Optional)         |
| Ringing Volume                               | Yes                   |
| Brightness /Contrast                         | Yes                   |

### Key features:

- Video intercom
- Doorbell call
- Home security alarm
- Differential signal 485 protocol
- Supply power and transmission signal over network cable

### Dimension & Installation:

